
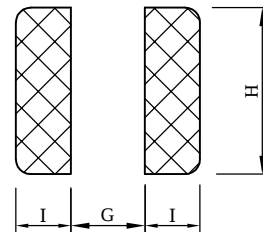



SPECIFICATION

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0503□□□□L□-□□□		
		REV.	20250313-K	PAGE	1	

I . Configuration and dimensions :

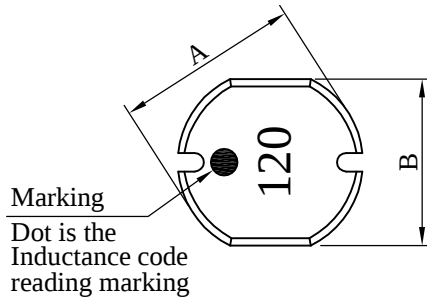

(PCB Pattern)

Unit : mm


A	B	C	D	G	H	I
5.00 ±0.3	4.50 ±0.3	3.00 ±0.3	2.00 ref.	1.90 ref.	5.00 ref.	1.80 ref.

II . Description :

- a . Ferrite drum core construction.
- b . Enamelled copper wire : H class
- c . Product weight : 0.210g (ref.)
- d . Moisture sensitivity Level 1
- e . Products comply with RoHS' requirements
- f . Halogen free

III . General specification :

- a . Operating temp. : -40°C-----+125°C
(Temp. rise included)
- b . Resistance to solder heat : 260°C.10 sec.

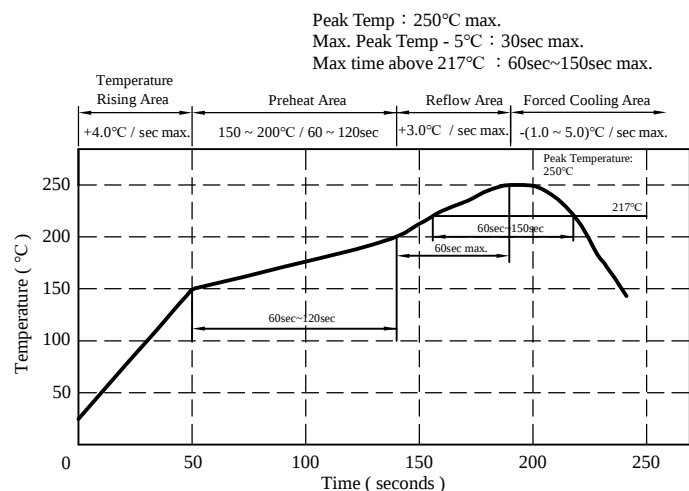

AR-001C

SPECIFICATION

REF. :

PROD.	SMD Power Inductor	ABC'S DWG NO.	SR0503□□□□L□-□□□			
NAME		REV.	20250313-K	PAGE	2	

IV . Electrical characteristics :

DWG. No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		SRF (MHz) nom	RDC (Ω) max.	IDC (A) max.
			L	Q			
SR0503R50YL□-□□□	0.5±30%	28	7.96M	7.960M	40.00	0.012	4.000
SR05031R0ML□-□□□	1.0±20%	28	7.96M	7.960M	40.00	0.016	3.000
SR05031R2ML□-□□□	1.2±20%	28	7.96M	7.960M	39.00	0.020	2.800
SR05031R8ML□-□□□	1.8±20%	28	7.96M	7.960M	38.00	0.030	2.500
SR05032R7ML□-□□□	2.7±20%	28	7.96M	7.960M	38.00	0.040	2.100
SR05033R3ML□-□□□	3.3±20%	25	7.96M	7.960M	37.00	0.056	1.900
SR05033R9ML□-□□□	3.9±20%	25	7.96M	7.960M	36.00	0.062	1.850
SR05034R7ML□-□□□	4.7±20%	25	7.96M	7.960M	35.00	0.068	1.700
SR05035R6ML□-□□□	5.6±20%	25	7.96M	7.960M	34.00	0.072	1.600
SR05036R8ML□-□□□	6.8±20%	25	7.96M	7.960M	33.00	0.088	1.450
SR05038R2ML□-□□□	8.2±20%	20	7.96M	7.960M	32.00	0.099	1.350
SR0503100ML□-□□□	10.0±20%	20	1k	2.520M	30.00	0.130	1.300
SR0503120ML□-□□□	12.0±20%	20	1k	2.520M	29.00	0.160	1.200
SR0503150ML□-□□□	15.0±20%	20	1k	2.520M	27.00	0.190	1.050
SR0503180ML□-□□□	18.0±20%	20	1k	2.520M	24.00	0.210	0.950
SR0503220ML□-□□□	22.0±20%	20	1k	2.520M	22.00	0.280	0.900
SR0503270ML□-□□□	27.0±20%	20	1k	2.520M	20.00	0.320	0.800
SR0503330KL□-□□□	33.0±10%	15	1k	2.520M	17.50	0.380	0.700
SR0503390KL□-□□□	39.0±10%	15	1k	2.520M	17.00	0.420	0.650
SR0503470KL□-□□□	47.0±10%	20	1k	2.520M	14.00	0.600	0.600
SR0503560KL□-□□□	56.0±10%	20	1k	2.520M	13.00	0.710	0.500
SR0503680KL□-□□□	68.0±10%	20	1k	2.520M	12.00	0.760	0.450
SR0503820KL□-□□□	82.0±10%	15	1k	2.520M	10.00	0.880	0.420
SR0503101KL□-□□□	100.0±10%	40	1k	0.796M	8.50	1.600	0.400
SR0503121KL□-□□□	120.0±10%	40	1k	0.796M	8.00	1.700	0.370
SR0503151KL□-□□□	150.0±10%	40	1k	0.796M	7.20	2.000	0.330
SR0503181KL□-□□□	180.0±10%	40	1k	0.796M	6.90	2.300	0.300
SR0503221KL□-□□□	220.0±10%	35	1k	0.796M	6.20	2.500	0.250
SR0503271KL□-□□□	270.0±10%	35	1k	0.796M	5.70	2.900	0.230
SR0503331KL□-□□□	330.0±10%	30	1k	0.796M	5.30	3.300	0.210
SR0503391KL□-□□□	390.0±10%	30	1k	0.796M	4.90	3.700	0.190
SR0503471KL□-□□□	470.0±10%	30	1k	0.796M	4.60	4.900	0.180
SR0503561KL□-□□□	560.0±10%	30	1k	0.796M	4.20	5.700	0.160
SR0503681KL□-□□□	680.0±10%	30	1k	0.796M	3.90	7.500	0.140
SR0503821KL□-□□□	820.0±10%	40	1k	0.796M	3.30	10.000	0.120
SR0503102KL□-□□□	1000.0±10 %	40	1k	0.252M	3.10	11.500	0.110
SR0503122JL□-□□□	1200.0± 5%	40	1k	0.252M	3.00	12.000	0.063
SR0503152JL□-□□□	1500.0± 5%	40	1k	0.252M	2.40	13.000	0.059
SR0503182JL□-□□□	1800.0± 5%	40	1k	0.252M	2.20	15.000	0.055
SR0503222JL□-□□□	2200.0± 5%	40	1k	0.252M	2.30	22.000	0.053

AR-001C

SPECIFICATION

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0503□□□□L□-□□□			
		REV.	20250313-K	PAGE	3		

DWG. No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		SRF (MHz) nom	RDC (Ω) max.	IDC (A) max.
			L	Q			
SR0503272JL□-□□□	2700.0 $\pm$ 5%	40	1k	0.252M	2.10	26.000	0.050
SR0503332JL□-□□□	3300.0 $\pm$ 5%	40	1k	0.252M	1.90	38.000	0.045
SR0503392JL□-□□□	3900.0 $\pm$ 5 %	40	1k	0.252M	1.50	40.000	0.042
SR0503472JL□-□□□	4700.0 $\pm$ 5%	40	1k	0.252M	1.40	48.000	0.040
SR0503562JL□-□□□	5600.0 $\pm$ 5%	40	1k	0.252M	1.30	72.000	0.038
SR0503682JL□-□□□	6800.0 $\pm$ 5%	40	1k	0.252M	1.20	80.000	0.034
SR0503822JL□-□□□	8200.0 $\pm$ 5%	40	1k	0.252M	1.00	92.000	0.030
SR0503103JL□-□□□	10000.0 $\pm$ 5%	30	1k	79.60k	0.95	110.000	0.027
SR0503123JL□-□□□	12000.0 $\pm$ 5%	30	1k	79.60k	0.85	148.000	0.025
SR0503153JL□-□□□	15000.0 $\pm$ 5%	30	1k	79.60k	0.80	168.000	0.020

- 1). Electrical specifications at 25°C
- 2). IDC base on $\Delta L/L0A=10\%$ max. & Temp. rise 40°C max.

AR-001C



SPECIFICATION

REF. :



PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0503□□□□L□-□□□		
		REV.	20250313-K	PAGE	4	

V . Curve :



SR0503R50YL□

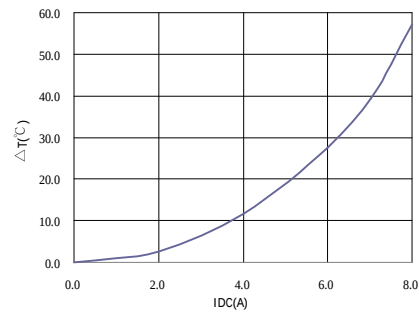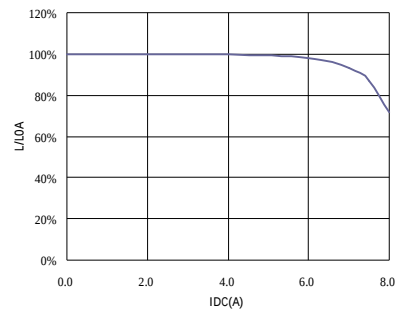



SR0503101KL□

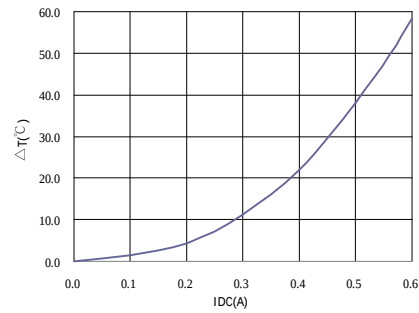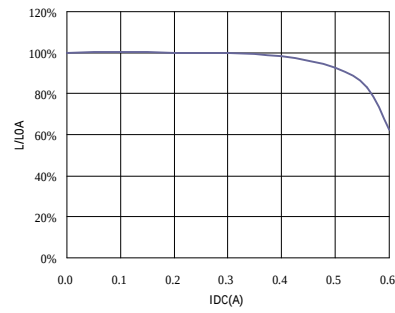

SR0503102KL□

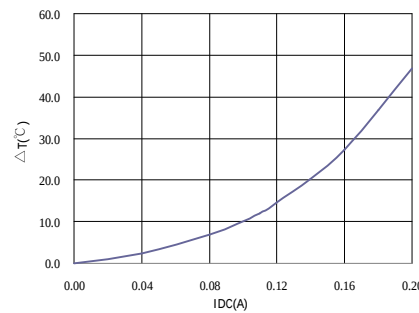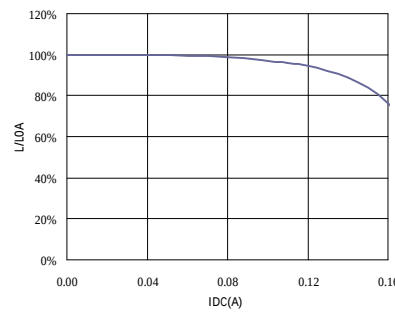

SR0503153JL□

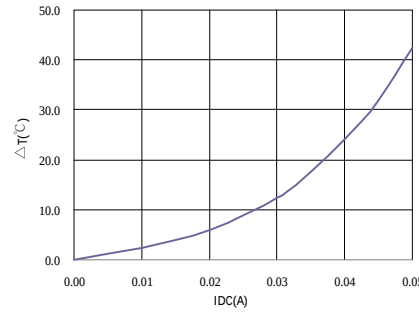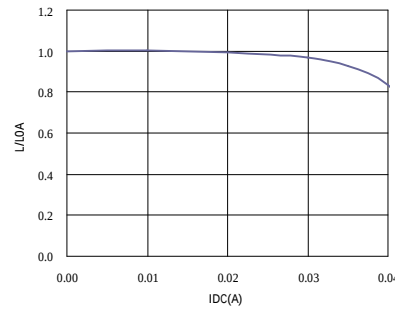

AR-001C



SPECIFICATION

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0503□□□□L□-□□□		
		REV.	20250313-K	PAGE	5	

VI . Packaging information :

(1) Configuration

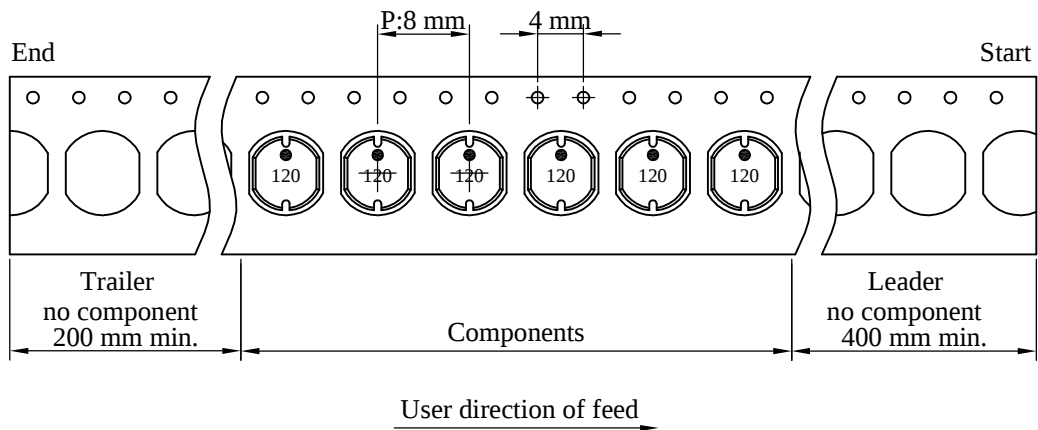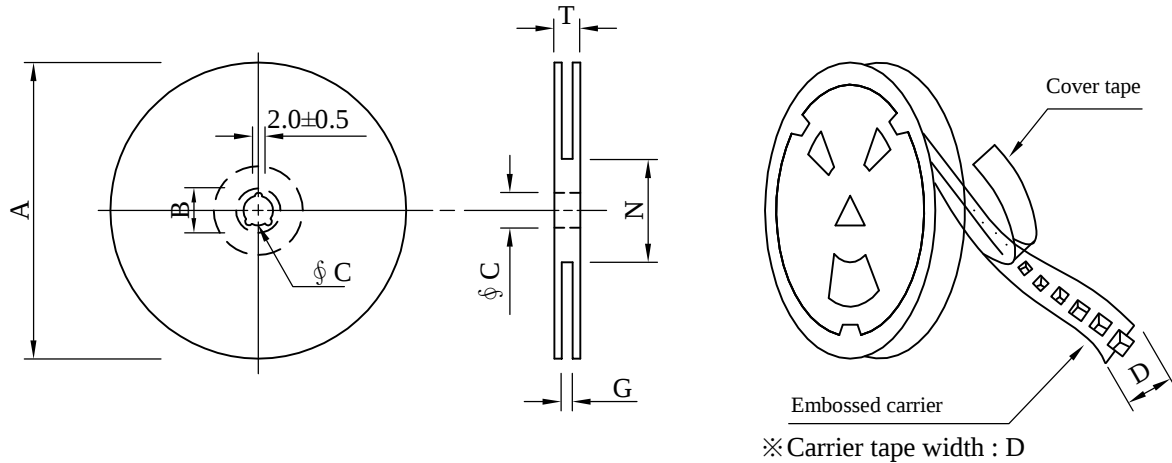

(2) Dimensions

Unit:mm

Style	A	B	C	D	G	N	T
07 - 12	178	21 ± 0.8	13	12	14^{+0}	50^{-0}	16.5
13 - 12	330	21 ± 0.8	13 ± 0.5	12	14^{+0}	50^{-0}	18.4

(3) Q'TY & G.W. Per package

Code	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (g)	Style	Q'TY (pcs)	G.W. (kg)	Size (cm)
B	500	210	07 - 12	20,000	9.6	42 x 41 x 24
C	2000	770	13 - 12	16,000	7.4	38 x 37 x 22


AR-001C

SPECIFICATION

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.		SR0503□□□□L□-□□□		
		REV.	20250313-K	PAGE	6	

VII . Drawing number expression :

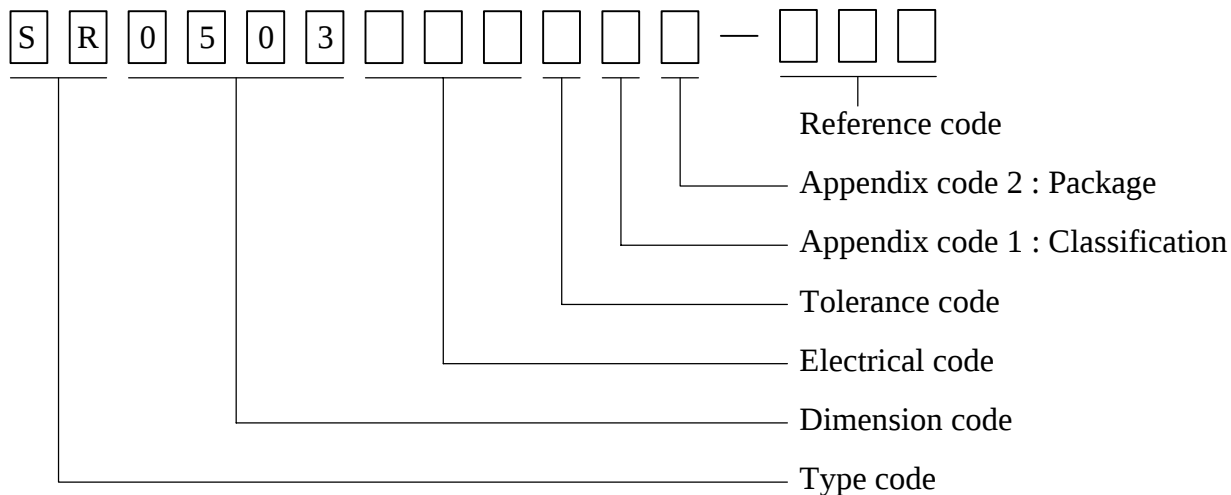

Appendix code 1 : Product Classification

Appendix code 2 : Package Information

Code	Inner package	Cover tape	Carrier tape	Bag	Package Q'TY	Remark
B	T /R (Reel package)	UCT	Antistatic	Antistatic	500 pcs	
C	T /R (Reel package)	UCT	Antistatic	Antistatic	2,000 pcs	

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP

SPECIFICATION

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.	SR0503□□□□L□-□□□		
		REV.	20250313-K	PAGE	7

VIII . Reliability test :

Item	Reference documents	Test Condition	Test Specification
1.High Temperature Exposure	MIL-STD-202 Method 108	1.Temperature: 125±2℃ 2.Time:96±2 hours.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.
2.Temperature Cycling	JESD22-A 104	1.Temperature: -40℃ ~ +125℃ 2.Number of cycle:100 cycles. 3.Dwell time:30 minutes	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.
3.Biased Humidity Test	MIL-STD-202 Method 103	1.Temperature : 85±2 °C 2.Humidity: 85% RH. 3.Time:96±2 Hours	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.
4.Operational Life	JESD22-A 108	1.Temperature: 125℃(Temp. rise included) 2.Time:96±2 hours. 3.Rated current	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.
5.External Visual	JESD22-B 101 & MIL-STD-883 Method 2009	Inspect product constructions, marking and workmanship.	1.No pollution on the surface of products. 2.Clear marking. 3.No crack.
6.Physical Dimensions	JESD22-B 100	Verify physical dimensions to the applicable product detail specification.	Per product specification standard
7.Resistance to solvents	MIL-STD-202 Method 215	Immerse into solvent for 3±0.5 minutes & brush 10 times for 3 cycles.	1.No body change in apperance. 2.No marking blurred. 3.Inductance shall not change more than ±10%.
8.Vibration Test	MIL-STD-202 Method 204	1.Frequency and Amplitued :10-2000-10 Hz 2.Sweep time : 20 min 3.Acceleration : 5g 4.Direction : X , Y , Z 5.Number of sweep : 6 time/axis	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.
9.Resistance To Soldering Heat Test	MIL-STD-202 Method 210 & J-STD020	1.Highest temperature : 250±5℃. 2.Time (temp.≥ 217℃) : 60~150 Seconds. 3.Reflow times : 3 times.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.
10.Saturation Current	JIS C 6436 & User SPEC.	1.Applied rated current for 5 seconds. 2.Saturation current	Inductance shall not drop more than 10% max.
11.Over load	JIS C 6436 & User SPEC.	1.Applied one and half rated current for a period of 5 minutes. 2.Rated current	No electrical or mechanical damage
12.Temperature Rise Current	JIS C 6436 & User SPEC.	1.Applied rated current for 10 minutes. 2.Temperature measure by digital surface thermometer. 3.Irms current	Surface temperature rise is less than 40 °C max.
13.Solderability Test	J-STD-002 & JESD22-B 102	1.Baking in pre-testing : 150±5℃ / 16Hours±30 min. 2.Peak temperature : 240±5℃ 3.Time (temp.≥217℃) : 60~150 seconds. 4.Reflow times : 1 times.	More than 95% soldering coverage min on terminations.
14.Electrical Characteriazation	MIL-STD-202 Method 304 & User SPEC.	1.Operating temperature : -40℃~125℃ 2.Room temperature : 25℃.	1.No mechanical or electrical damage. 2.Inductance shall not change more than ±10%.
15.Drop	CNS-C6354 & GB/T 2423.8	1.Products shall be mounted on SPEC. pcb and dropped down from a heigh of 1m 2.Drop total time : 6 times. (Every side ofsample drop 2 times)	1. Adhesion on PCB shall be enough. 2. Product appearance shall not break. 3. No electrical damage.
16.Terminal Strength Test	IEC 60068-2-21	1.Apply push force to samples mounted on PCB. 2.Force of 1.8 kg for 60±1 seconds.	After test, inductors shall be no mechanical damage.

AR-001C

SPECIFICATION

REF. :

PROD. NAME	SMD Power Inductor	ABC'S DWG NO.	SR0503□□□□L□-□□□		
		REV.	20250313-K	PAGE	8

IX . Safety notes :

1. The risks of using the product are highly relevant to the field of application and need to be evaluated by both user and manufacturer. If the product is used for a purpose that directly affects personal safety or will cause significant impact or loss to the society , please be sure to contact us first for confirmation.
產品使用的風險與應用領域有高度相關，若您應用於直接影響人身安全系統或對社會會造成重大影響與損失之相關用途，請務必優先與我們聯繫確認。
2. The storage period is less than 12 months. Ensure to follow the storage conditions (Temperature: 5 to 30°C, Humidity: 10 to 60% RH or less). If the storage time is exceeded the limit, the electrodes might be deteriorate of terminal soldering.
儲存期不超過12個月，務必遵守儲存條件（溫度：5至30℃，濕度：10至60%RH以下）。如果超過了儲存時間，端子電極可能會氧化而影響焊接。
3. Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
不要在有氣體腐蝕等條件的地方使用或存放（鹽，酸，鹼等）。
4. Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
安裝時的焊接條件應在規格範圍內。如果超過要求，可能會發生短路，性能下降或壽命縮短。
5. When using, it should try to avoid excessive mechanical impact on the product, such as collision / drop ... and other reasons.
使用時，應盡量避免產品受到過度機械衝擊，如碰撞/掉落...等原因。
6. When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
將已安裝新片的電路板組裝到裝置時，請注意應盡量避免電路板受到組裝變形...等，導致產品受到應力。
7. Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
產品會因通電而自我發熱(溫度上升)，因此在熱影響設計方面，需保留適當公差。
8. Do not expose the products to magnets or magnetic fields.
請勿將產品暴露於磁鐵或是磁場中。
9. If you would like to use this products to performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property, or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.
如果您希望將此產品用於性能和/或質量要求更嚴格的安全性或可靠性，或其失敗、故障或麻煩可能對社會、個人或財產造成嚴重損害，或者您有特殊情況要求超出目錄中規定的範圍或條件，請與我們聯繫。