


SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		CHE0402□□□□S□-□□□	
		REV.	20240723	PAGE	1

I . Configuration and dimensions :

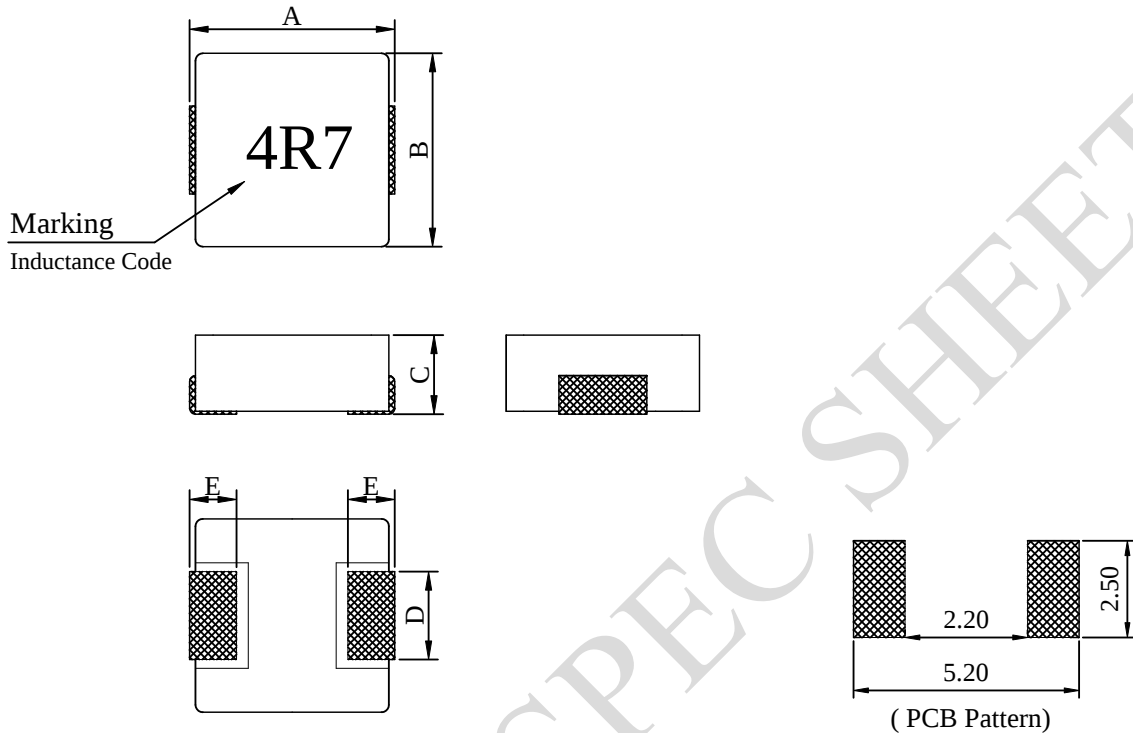

Unit : mm


A	B	C	D	E
4.40 ±0.35	4.20 ±0.25	2.00 max.	2.00 ±0.50	0.80 ±0.50

II . Description :

- a . Powder molding construction
- b . Enamelled copper wire : H⁺ class
- c . Product weight : 0.180 g (ref.)
- d . Moisture sensitivity Level 1
- e . Products comply with RoHS' requirements
- f . Halogen free
- g . AEC-Q200 Grade 1

III . General specification :

- a . Operating temp. : -55°C-----+125°C
(Temp. rise included)
- b . Resistance to solder heat : 260°C.10 sec.

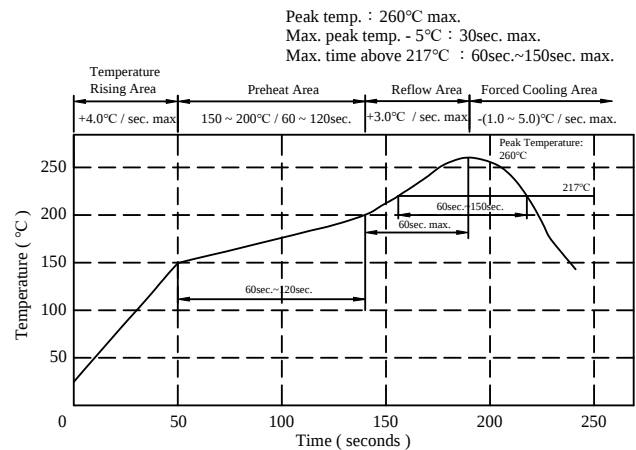

AR-001C

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		CHE0402□□□□S□-□□□	
		REV.	20240723	PAGE	2

IV . Electrical characteristics :

KEY

DWG No.	Inductance (μ H)	Test Freq. (Hz)	RDC ($m\Omega$) max.	Isat (A) typ.	Irms (A) typ.
CHE0402R10MS□-□□□	0.10 $\pm$ 20%	100k / 1V	4.00	22.00	13.00
CHE0402R22MS□-□□□	0.22 $\pm$ 20%	100k / 1V	6.60	12.50	9.50
CHE0402R33MS□-□□□	0.33 $\pm$ 20%	100k / 1V	11.00	12.00	8.50
CHE0402R47MS□-□□□	0.47 $\pm$ 20%	100k / 1V	14.00	9.50	7.50
CHE0402R56MS□-□□□	0.56 $\pm$ 20%	100k / 1V	16.00	9.00	7.00
CHE0402R68MS□-□□□	0.68 $\pm$ 20%	100k / 1V	18.00	9.00	7.00
CHE04021R0MS□-□□□	1.00 $\pm$ 20%	100k / 1V	30.00	7.00	6.00
CHE04021R5MS□-□□□	1.50 $\pm$ 20%	100k / 1V	46.00	6.00	5.00
CHE04022R2MS□-□□□	2.20 $\pm$ 20%	100k / 1V	58.00	5.00	4.50
CHE04023R3MS□-□□□	3.30 $\pm$ 20%	100k / 1V	87.00	4.00	3.30
CHE04024R7MS□-□□□	4.70 $\pm$ 20%	100k / 1V	105.00	3.00	2.80
CHE04026R8MS□-□□□	6.80 $\pm$ 20%	100k / 1V	175.00	2.50	2.40
CHE04028R2MS□-□□□	8.20 $\pm$ 20%	100k / 1V	250.00	2.20	1.80
CHE0402100MS□-□□□	10.0 $\pm$ 20%	100k / 1V	282.00	2.00	1.60

- 1). Electrical specifications at 25°C
- 2). Isat base on $\Delta L/L0A = 30\%$ typ.
- 3). Irms base on temp. rise 40°C typ.
- 4). Rated operating voltage(across inductor) : 30V



SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		CHE0402□□□□S□-□□□		
		REV.	20240723	PAGE	3	

V . Packaging information :

(1) Configuration

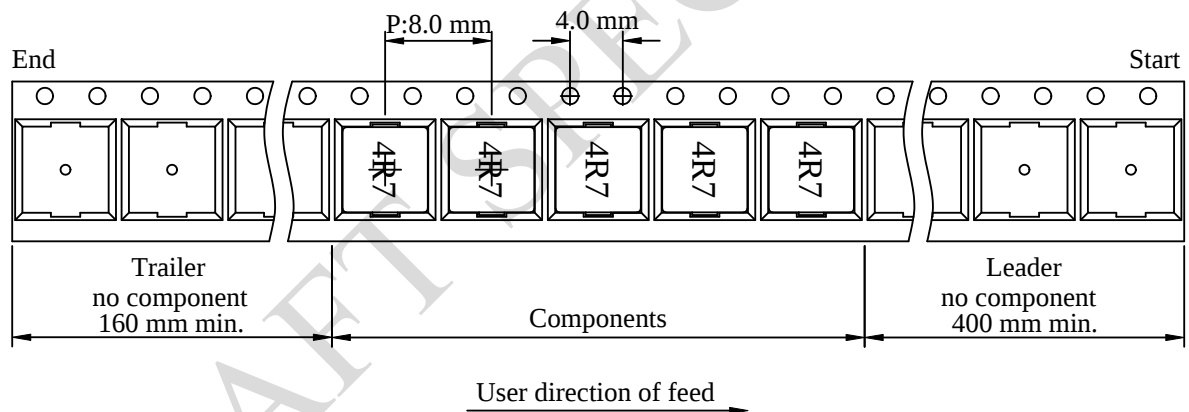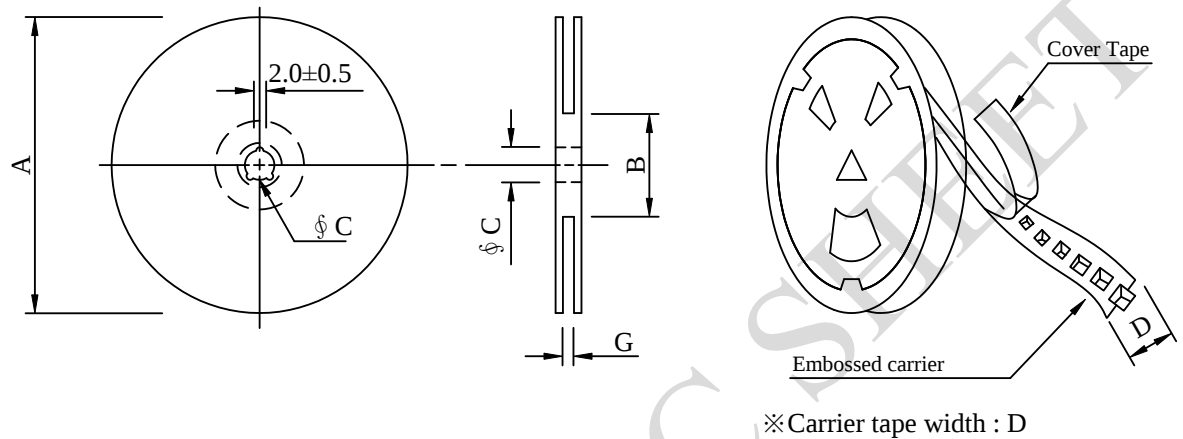

(2) Dimensions

Unit:mm

Style	A	B	C	D	G
13 - 12	330±1.0	100±1.0	13.2±0.5	12	12.5±0.2

(3) Q'TY & G.W. Per package

Code	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (g)	Style	Q'TY (pcs)	G.W. (kg)	Size (cm)
B	3,000	800	13 - 12	24,000	7.3	35.6 x 35.8 x 18.7

AR-001C

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		CHE0402□□□□S□-□□□		
		REV.	20240723		PAGE	4

VI . Drawing number expression :

Diagram illustrating the structure of a 13-digit automotive code:

- Automotive
- Type code
- Electrical code
- Dimension code
- Tolerance code
- Appendix code 1 : Classification
- Appendix code 2 : Package
- Reference code 1

Appendix code 1 : Product Classification

Appendix code 2 : Package Information

Code	Inner package	Cover tape	Carrier tape	Bag	Package Q'TY	Remark
B	T /R (Reel package)	NA	NA	NA	3,000 pcs	

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		CHE0402□□□□S□-□□□		
		REV.	20240723	PAGE	5	

VII . Reliability test :

Item	Reference documents	AEC-Q200 Test Condition	Specification
1.Humidity Resistance	MIL-STD-202 Method 103	1.Temperature: 40±2°C. 2.Relative Humidity: 90%. 3.Duration: 1000 +4/-0 hours.(ORT: 96 hrs)	1.Appearance: No damage. 2.Inductance shall not change more than ±10%.
2.Temperature Shock	JESD22 Method JA-104	1.Temperature : Rated operating temperature (e.g. -55±2°C~+125±2°C) Kept for 30min. 2.maximum Transition 2.time : 5 min. maximum 100 Cycles.	1.Appearance: No damage. 2.Electrical Test : within ±10% of initial.
3.High Temperature Resistance	EIL-STD-202 Method 108	1.Temperature : Rated operating temperature (e.g. +125±2°C) 2.Duration : 1000 +4/-0 hours.	1.Appearance: No damage. 2.Inductance shall not change more than ±10%.
4.Low Temperature Resistance	IEC68-2-1	1.Temperature : Rated operating temperature (e.g. -40±2°C). 2.Duration : 1000 +4/-0 hours.	1.Appearance: No damage. 2.Inductance shall not change more than ±10%.
5.Dropping	IEC68-2-32	Drop component 10 times on a concrete floor from a height of 100cm.	1.No visible mechanical damage. 2.Inductance shall not change more than ±10%
6.Solderability test	J-STD-002	1.Preheating : 160°C,60sec. 2.Solder temperature : 245±5°C. 3.Duration : 5 sec.	90% or more of electrode area shall be coated by new solder.
7.Solderability y Heat test	MIL-STD-202Method 210	1.Solder temperature : 260+0/-5°C. 2.Duration : 5 sec. 3.Allowed reflow time : 2 times.	1.Appearance: No damage. 2.Inductance shall not change more than ±10%.
8.Flexure Strength	AEC-Q200-005	1.Flexure: 2mm. 2.Pressurizing Speed: 0.5mm/sec. 3.Keep time: 30±1sec.	No visible mechanical damage.
9.Vibration test	MIL-STD-202 Method204	1.Oscillation Frequency : 10Hz to 55Hz to 10Hz in 60 seconds as a period. 2.Total amplitude : 1.5mm. 3.Testing Time : a period of 2 hours in each 3 mutually perpendicular directions.(total of 6 hours).	1.Appearance: No damage. 2.Inductance shall not change more than ±10%.
10.Terminal Strength	MIL-STD-202 Method211	1.Force: 2N for 0402 series. 2.Force: 5N for 0603 series. 3.Force: 10N for 0805 series above 4.Keep time: 5 sec, X,Y directs.	No visible mechanical damage.

AR-001C



千如電子集團
ABC-ATEC ELECTRONICS GROUP

SPECIFICATION FOR APPROVAL

REF. :

PROD. NAME	Shielded SMD Power Inductor	ABC'S DWG NO.		CHE0402□□□□S□-□□□	
		REV.	20240723	PAGE	6

VIII . Safety notes :

1. Products do not be used in related applications that directly affect the personal safety system or cause significant impacts and losses on society. If you apply to these applications, please be sure to contact us at first to confirm.
產品不可使用於直接影響人身安全系統或對社會會造成重大影響與損失之相關用途，若您應用於此，請務必優先與我們聯繫確認。
2. The storage period is less than 12 months. Ensure to follow the storage conditions (Temperature: 5 to 30°C, Humidity: 10 to 60% RH or less). If the storage time is exceeded the limit, the electrodes might be deteriorate of terminal soldering.
儲存期不超過12個月，務必遵守儲存條件（溫度：5至30°C，濕度：10至60%RH以下）。如果超過了儲存時間，端子電極可能會氧化而影響焊接。
3. Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
不要在有氣體腐蝕等條件的地方使用或存放（鹽，酸，鹼等）。
4. Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
安裝時的焊接條件應在規格範圍內。如果超過要求，可能會發生短路，性能下降或壽命縮短。
5. When using, it should try to avoid excessive mechanical impact on the product, such as collision / drop ... and other reasons.
使用時，應盡量避免產品受到過度機械衝擊，如碰撞/掉落...等原因。
6. When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
將已安裝新片的電路板組裝到裝置時，請注意應盡量避免電路板受到組裝變形...等，導致產品受到應力。
7. Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
產品會因通電而自我發熱(溫度上升)，因此在熱影響設計方面，需保留適當公差。
8. Do not expose the products to magnets or magnetic fields.
請勿將產品暴露於磁鐵或是磁場中。
9. If you would like to use this products to performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property, or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.
如果您希望將此產品用於性能和/或質量要求更嚴格的安全性或可靠性，或其失敗、故障或麻煩可能對社會、個人或財產造成嚴重損害，或者您有特殊情況要求超出目錄中規定的範圍或條件，請與我們聯繫。